

EVENTLINE


according to IEC 60309, EN 60309, VDE 0623



PLUG, BLACK

splash-proof IP44

- screw terminals
- quick release locking system (turn2fix)
- brass contacts

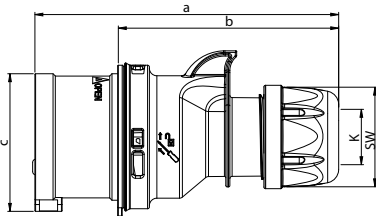

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	109	128	151	181	201	232

VOLTAGE	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz
DESIGNATION	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h


AMPERE	POLES	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	S31S20B		10
16	4		S41S30B	10
16	5		S51S30B	10
32	3	S32S20B		10
32	4		S42S30B	10
32	5		S52S30B	10



CONNECTOR, BLACK

splash-proof IP44

- hinged lid with thumb grip
- screw terminals
- quick release locking system (turn2fix)
- brass contacts

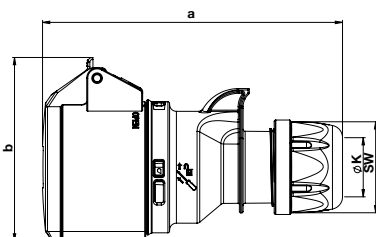

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	133	138	145	161	161	168
b	76	80	89	91	94	100
K	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
SW	42	42	42	50	50	50
Weight [g/each]	134	161	188	228	244	270

VOLTAGE	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz
DESIGNATION	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	K31S20B		10
16	4		K41S30B	10
16	5		K51S30B	10
32	3	K32S20B		10
32	4		K42S30B	10
32	5		K52S30B	10