

COMBI-WALL-MOUNTED SOCKET OUTLETS


according to IEC 60309, EN 60309, VDE 0623



COMBI-WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- wall box with integrated SCHUKO socket outlet
- connecting terminals up to 10 mm²
- pre-wired
- cable entry above, 2x below or behind
- for 32 A: SCHUKO socket outlet fused, fuse (10 A delayed-tripping)
- including self-sealing grommet
- brass contacts

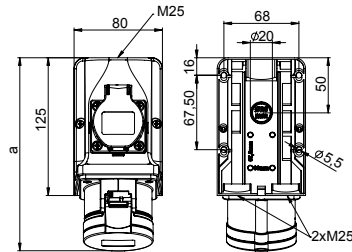

POLES	4	5	4	5
AMPERE	16		32	

a	176	176	188	188
b	130	133	136	141
M	3x25	3x25	3x25	3x25
Weight [g/each]	405	424	470	481

b = Height, Angle = 15°

VOLTAGE	400 V~
FREQUENCY	50/60 Hz
DESIGNATION	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	PACKING UNIT
16	4	D41S331	5
16	5	D51S331	5
32	4	D42S331	5
32	5	D52S331	5



COMBI-WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- wall box with integrated protective contact socket outlet with earth pin (CEE 7/V)
- connecting terminals up to 10 mm²
- pre-wired
- cable entry above, 2x below or behind
- for 32 A: protective contact socket outlet fused, fuse (10 A delayed-tripping)
- including self-sealing grommet
- brass contacts

VOLTAGE	400 V~
FREQUENCY	50/60 Hz
DESIGNATION	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	PACKING UNIT
16	4	D41S333	5
16	5	D51S333	5
32	4	D42S333	5
32	5	D52S333	5