

DIN-RAIL PANEL PRODUCTS

Digital timer



DIGITAL TIMER

230 V~, 50/60 Hz, 16 A
 1 channel, 50 storage places
 2 channels, 50 storage places
 Program 24 h, 7 days


2 M

	ITEM NO.	WEIGHT g / EACH	PACKING UNIT
--	----------	-----------------	--------------

1 channel	DZ201	170	1
2 channels	DZ302	170	1



Technical data / Typ	DZ201	DZ302
Operating voltage	220-240 V / 50-60 Hz	
Power input up to 230 V~ (AC)	5 VA	
Switching capacity AC Ohmic load (VDE, IEC) Inductive load cos. φ 0,6 Incandescent lamp load	16 A / 250 V AC 8 A / 250 V AC 1000 W	
Switching capacity DC 24 V- 50 V- 220 V-	800 mA 300 mA 150 mA	
Switching output	Floating	
Switching contacts	1 CO contact	2 CO contact
Ambient temperature	-25 °C *) ... + 55 °C	
Protection class	II acc. to EN 60335-1	
Accuracy	type ± 1 s / day when +20 °C	
Power reserve	3 years ex works for +20 °C	
Shortest switching time	1 min	
Programmable	1 min	
Storage places	50	
Manual switch	Automatic / pre-selection Fix ON/ Fix OFF	
Block formation of week days	Free assignment	
Display switch state	Yes	
Daylight saving time option	automatic / free selection / off	
Max. conductor cross section	4 mm ²	
Type of connection	Captive ± screw terminals	
Sealable	Yes	
Programming	Menu in 15 languages	

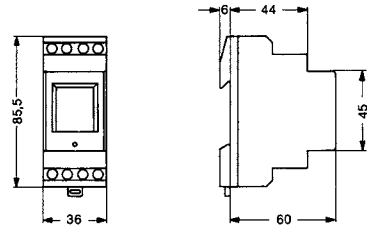

*) for limited display functions