


SWITCHABLE WALL-MOUNTED SOCKETS

splash-proof IP44

Locking mechanism
 Nickel plated contacts
 Padlock lockable
 Top, bottom and rear cable inlets
 All components stationary
 to the bottom section

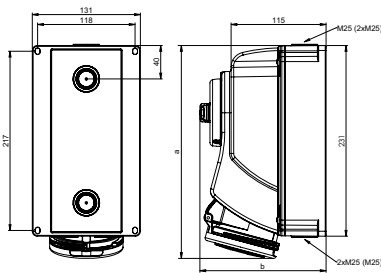


NO. OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	249	249	249	259	259	259
b	146	146	146	150	150	157
M	3x25	3x25	3x25	3x25	3x25	3x25
Switching contacts	2	3	4	2	3	4
Weight [g/each]	1067	1072	1118	1123	1136	1183

VOLTAGE		110 V~	230 V~	400 V~	440 V~	500 V~	
FREQUENCY		50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	
DESIGNATION		4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h	
AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PU
16	3	C31S102	C31S202	C31S302		C31S502	1
16	4	C41S102	C41S202	C41S302	C41S402	C41S502	1
16	5	C51S102	C51S202	C51S302		C51S502	1
32	3	C32S102	C32S202	C32S302		C32S502	1
32	4	C42S102	C42S202	C42S302	C42S402	C42S502	1
32	5	C52S102	C52S202	C52S302		C52S502	1

SWITCHABLE WALL-MOUNTED SOCKETS

waterproof IP67

Locking mechanism
 Nickel plated contacts
 Padlock lockable
 Top, bottom and rear cable inlets
 All components stationary
 to the bottom section

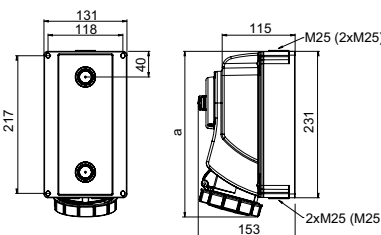

NO. OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	251	251	253	260	260	262
b	153	153	153	153	153	153
M	3x25	3x25	3x25	3x25	3x25	3x25
AC 22A	20 A	20 A	20 A	32 A	32 A	32 A
Switching contacts	2	3	4	2	3	4
Weight [g/each]	1130	1150	1190	1210	1220	1270

VOLTAGE		110 V~	230 V~	400 V~	440 V~	500 V~	
FREQUENCY		50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	
DESIGNATION		4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h	
AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PU
16	3	C31S152	C31S252	C31S352		C31S552	1
16	4	C41S152	C41S252	C41S352	C41S452	C41S552	1
16	5	C51S152	C51S252	C51S352		C51S552	1
32	3	C32S152	C32S252	C32S352		C32S552	1
32	4	C42S152	C42S252	C42S352	C42S452	C42S552	1
32	5	C52S152	C52S252	C52S352		C52S552	1