

LOW-VOLTAGE PLUGS AND SOCKET OUTLETS


according to IEC 60309, EN 60309, VDE 0623



PANEL-MOUNTED SOCKET OUTLET STRAIGHT

watertight IP67

- screw terminals
- nickel-plated contacts

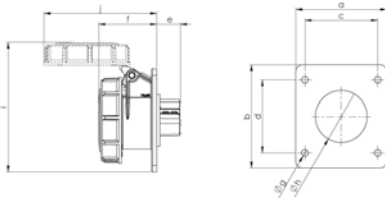

POLES	2	3	2	3
AMPERE	16		32	

a	54	54	54	54
b	60	60	60	60
c	44	44	44	44
d	44	44	44	44
e	19	19	19	19
f	48	48	48	48
g	5,5	5,5	5,5	5,5
h	43	43	43	43
Weight [g/each]	131	151	131	151

VOLTAGE	24 V~	42 V~	24/42 V~
FREQUENCY	50/60 HZ	50/60 HZ	100-200 HZ
DESIGNATION	WITHOUT AUXILIARY NOTCH	12H	4H

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	2	F01S254	F01S654	F01S154	10
		F11S254	F11S654	F11S154	
32	2	F02S254	F02S654	F02S154	10
		F12S254	F12S654	F12S154	