WALL-MOUNTED SOCKET OUTLETS

according to IEC 60309, EN 60309, VDE 0623

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	142	145	144	155	155	157
b	97	98	104	106	106	111
M	25	25	25	25	25	25
Weight [g/each]	226	240	259	274	291	318

b = Height, Angle = 15°

WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- screw terminals
- cable entry from above or behind
- including self-sealing grommet
- brass contacts



VOLTAGE	110 V~	230 V~	400 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIGNATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	7h

AMPERE	POLES	ITEM NO.	ITEM NO.	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	D31S11	D31S21		D31S51	10
16	4	D41S11	D41S21	D41S31	D41S51	10
16	5		D51S21	D51S31	D51S51	10
32	3	D32S11	D32S21		D32S51	10
32	4	D42S11	D42S21	D42S31	D42S51	10
32	5		D52S21	D52S31	D52S51	10

POLES	3	4	5	3	4	5
AMPERE	16			32		

a	175	176	176	188	188	188
b	127	130	133	136	136	141
M	3x25	3x25	3x25	3x25	3x25	3x25
Weight [g/each]	291	304	322	338	355	382

b = Height, Angle = 15°

WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- screw terminals
- can be looped through
- cable entry from above or 2x behind
- including self-sealing grommet
- brass contacts

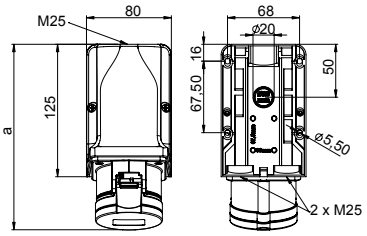

VOLTAGE	230 V~	400 V~
FREQUENCY	50/60 Hz	50/60 Hz
DESIGNATION	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	ITEM NO.	PACKING UNIT
16	3	D31S22		5
16	4	D41S22	D41S32	5
16	5	D51S22	D51S32	5
32	3	D32S22		5
32	4	D42S22	D42S32	5
32	5	D52S22	D52S32	5