

DIN-RAIL PANEL PRODUCTS


Installation contactors



INSTALLATION CONTACTOR
20 A / 230 V AC
2-pole · Control voltage 230 V AC

1 M


	ITEM NO.	WEIGHT g/EACH	PACKING UNIT
2NO	IS2020	200	12
1NO 1NC	IS2011	200	12

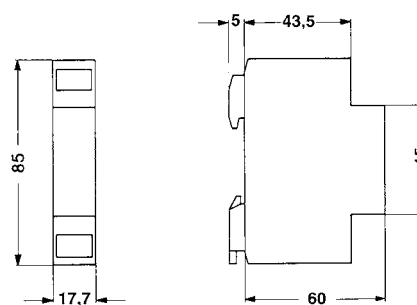

INSTALLATION CONTACTOR
25 A 230 / 400 V AC
4-pole · Control voltage 230 V AC

2 M


	ITEM NO.	WEIGHT g/EACH	PACKING UNIT
4NO	IS2540	280	6
2NO 2NC	IS2522	280	6
3NO 1NC	IS2531	280	6

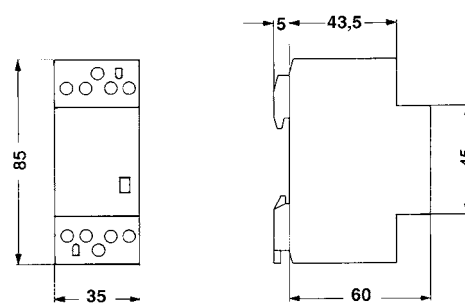

INSTALLATION CONTACTOR
40 A and 63 A 230 / 400 V AC
4-pole · Control voltage 230 V AC

3 M


	ITEM NO.	WEIGHT g/EACH	PACKING UNIT
4NO	IS4040	450	4
4NO	IS6340	450	4

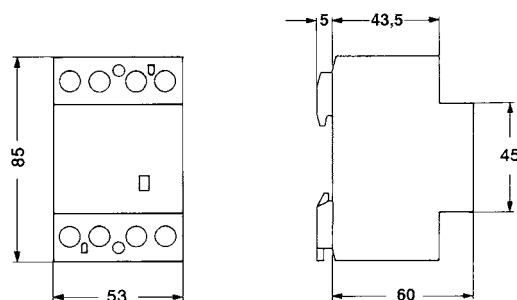

AUXILIARY CONTACT
Continuous thermal current $I_{th} = 6$ A
Rated operating current I_e
with AC - 15 for U_e 240 V AC 3 A
415 V AC 2 A
440 V AC 1,6 A

1/2 M

	ITEM NO.	WEIGHT g/EACH	PACKING UNIT
1NO 1NC	ISH11	23	3

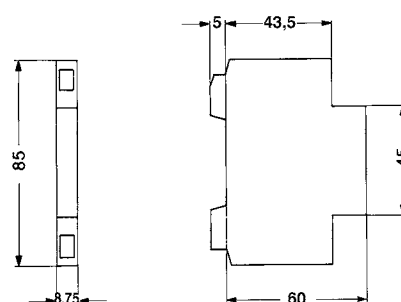

SEALING CAP

	ITEM NO.	WEIGHT g/EACH	PACKING UNIT
2 M	ISP2	2	10
3 M	ISP3	3	10



DISTANCE DEVICE 9MM

	ITEM NO.	WEIGHT g/EACH	PACKING UNIT
1/2 M	ISD	13	10

We recommend the use of distance devices at ambient temperatures higher than 40° C