

PHASE INVERTERS


according to IEC 60309, EN 60309, VDE 0623



PHASE INVERTER

splash-proof IP44

- screw terminals
- quick release locking system (turn2fix)
- brass contacts

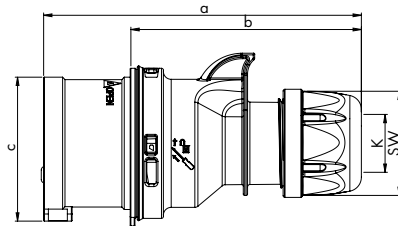

POLES	5	5
AMPERE	16	32

a	134	155
b	98	109
c	61	70
K	8-16	11,5-22
SW	42	50
Weight [g/each]	154	236

VOLTAGE	400 V~
FREQUENCY	50/60 Hz
DESIGNATION	3p = 9h 4p/5p = 6h


AMPERE	POLES	ITEM NO.	PACKING UNIT
16	5	S51S30P	10
32	5	S52S30P	10



PHASE INVERTER – WALL-MOUNTED INLET

splash-proof IP44

- screw terminals
- cable entry from above or behind
- brass contacts



b = Height
Angle = 15°

POLES	5	5
AMPERE	16	32

a	122	132
b	79	85
M	25	25
Weight [g/each]	205	255

VOLTAGE	400 V~
FREQUENCY	50/60 Hz
DESIGNATION	3p = 9h 4p/5p = 6h

AMPERE	POLES	ITEM NO.	PACKING UNIT
16	5	G51S30P	10
32	5	G52S30P	10