

SERIES
60

WALL-MOUNTED DISTRIBUTOR BOXES (PLASTIC)

splash-proof IP44, pre-wired ready to connect


Housing size

W x H x D 260 x 319 x 146 mm (without additions)


PBT/PC-Blend, angled cover

Cable inlets: top and bottom, 2 x M40 each


With window and mounting rail for 12 modules

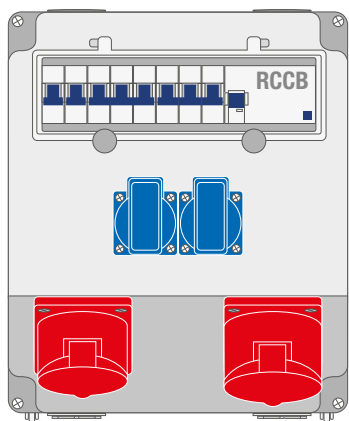


①

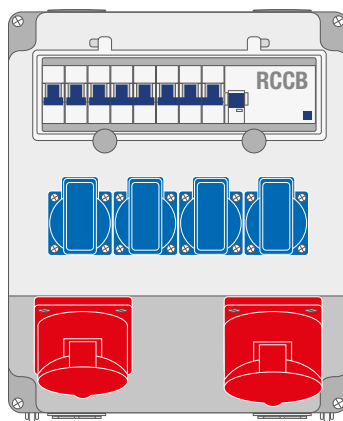


②

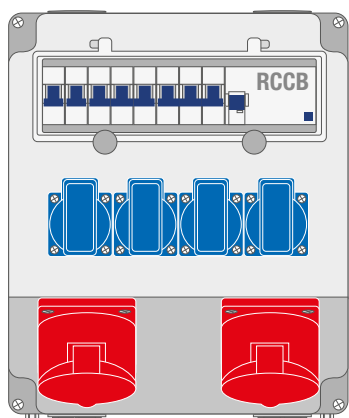

③

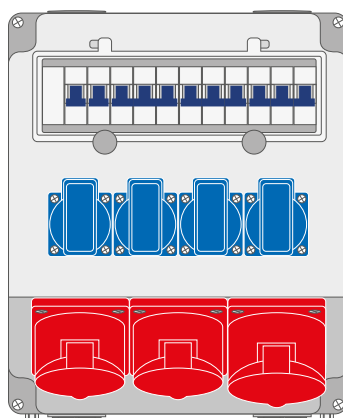

④

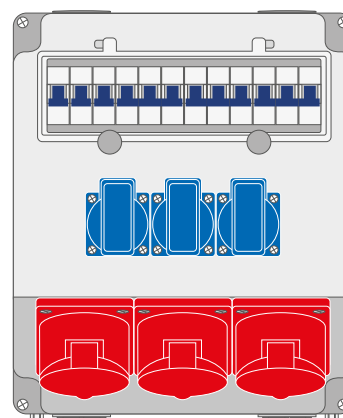

⑤

①

②

③

④

⑤

| | | | | | |
|---------------------------|--|--|---|--|---|
| CEE Sockets | 1 x 5/16 A + 1 x 5/32 A | 1 x 5/16 A + 1 x 5/32 A | 2 x 5/32 A | 2 x 5/16 A 1 x 5/32 A | 3 x 5/16 A |
| SCHUKO Sockets | 2 | 4 | 4 | 4 | 3 |
| RCCB | 1 x 4/40/0,03 A | 1 x 4/40/0,03 A | 1 x 4/40/0,03 A | | |
| Miniature Circuit Breaker | 1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C | 1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C | 2 x 32 A, 3-pole C 2 x 16 A, 1-pole C | 1 x 32 A, 3-pole C 2 x 16 A, 3-pole C 2 x 16 A, 1-pole C | 3 x 16 A, 3-pole C 3 x 16 A, 1-pole C |
| Note | with clamping block 2x5x25 mm ² | with clamping block 2x5x25 mm ² | with clamping block 2x5x25 mm ² | with clamping block 2x5x25 mm ² | with clamping block 2x5x25 mm ² |
| Item No. | Z 60.16 | Z 60.14 | Z 60.32 | Z 60.15 | Z 60.01 |
| | STOCK ITEM | STOCK ITEM | | | |